


Door Air Grille Installation Guide



1. Cut your hole into the solid core door ensuring the correct size. A 600x600mm vent would require a 600x600mm opening. The flange framing completely covers the opening

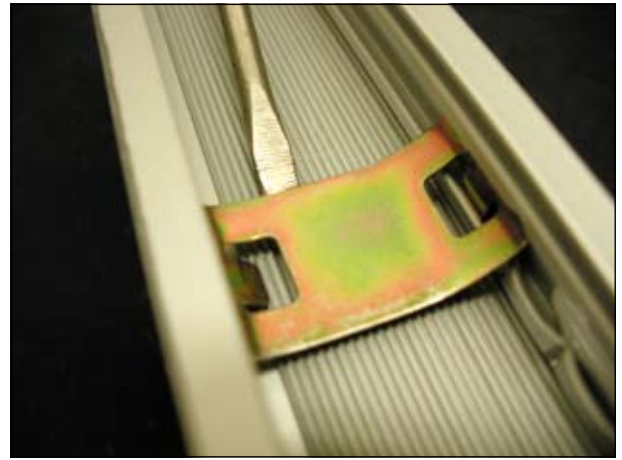

2. Pull apart your Klimat Door Air Grille using a flat-head screwdriver



3. Place the un-vented side into the opening



4. Ensuring the clips are evenly spread (one on each side on the top and bottom), slide the vented side into the opening engaging each of the clips into the un-vented side



5. Once all four sides are engaged push the door air grille closed completely

Optional step

For extra tightness you can screw the flange frame into the door.

Klimat Australia

T: 1300 663 848

info@klimat.com.au

www.klimat.com.au